

## A Carter Thermo-Quad Guide

---

Author: Gary Lewallen (aka. Vaanth)  
Date: 24 February 1998

---

Copyright 1998 Gary Lewallen

---

Contents...

---

- = Introduction
  - = History and Description
    - General
    - Identification
  - = Subsystems
  - = Port Diagram
  - = Choices and Adaptations
  - = Numeric Listing
    - Thermo-Quad
    - Rochester Quadrajets
  - = Modification of Subsystems
  - = References
  - = Acknowledgements
- 

Introduction...

---

The Carter Thermo-Quad is a four-barrel carburetor with a spreadbore throttle bore configuration. It was designed as an emissions capable carburetor that retained or surpassed secondary throttle performance of earlier Carter carburetors, while delivering superior primary fuel economy. The Thermo-Quad consists of three main sub-assemblies, an aluminum fuel bowl cover, a phenolic resin main body, and an aluminum throttle base assembly. The Thermo-Quad derives its name from the phenolic main body. Due to the material of the body, the carburetor bowl can stay 20 degrees cooler than an all metal carburetor in the same environment. The Thermo-Quad was used by Chrysler Corporation in cars and trucks 1971-1984. Aftermarket versions were also produced by Carter.

This guide is intended to provide information for identifying Thermo-Quad carburetors and related items. It provides a basic history and basic descriptions of the carburetor and its subsystems. It is not intended as a full theory of operation manual nor a repair manual. Service documentation should be consulted for repair procedures and service details. The factory service manuals provide good service procedures and theory for specific models. Other sources may be consulted for general repair and modification procedures as well as theory of operation. See the list of references for sources.

This guide is written with carburetor 'swapping' in mind. Thus, certain items are discussed with modification consideration (ie. emission subsystem disablement) with the intent for adapting a non-original carburetor and/or enhancing performance. The modification and adaptation of the carburetors may present legal issues, so consider the interest of any appropriate government(s).

-----  
History and Description...  
-----

General:

- - - -  
The Thermo-Quad (TQ) was initially released for competition in 1969. Chrysler introduced the TQ on the 1971 340. The first series of TQs including the 71 340 version and the Competition Series TQs were air metered units unlike like the 72 and later TQs which were solid (liquid) fuel metered. The Competition Series (CS) were available in 850 cfm and 1000 cfm ratings. CS units use a manual choke and have a minimal amount of external attachments compared to OEM production units. The CS was discontinued in the mid-70s. Carter released the 9000 series in the latter 70s as replacement carburetors for Chrysler and GM Quadrajets applications. The 9000 series was very similar to the production Chrysler Thermo-Quads.

In 1972, the OEM Chrysler TQs changed to the solid fuel metering type. The TQ coverage was expanded to include the 400 engine. By 1973, all Chrysler 4-bbl applications were TQs (except some 413 truck models which continued to use a Holley carburetor). As the years progressed, the TQ evolved to meet the continually tightening emissions requirements. The changes were numerous. Many features were added or modified externally and internally. The late 70s contained many variations for the various geographic regions, the various features included/excluded, and the range of applications and engines produced. Into the 80s, the TQ became more complex, but year to year major variation lessened somewhat. In 1973, TQs received a port on the base for canister purge and a port on the main body to provide a venturi vacuum signal for EGR applications. 1975 saw the introduction of the Idle Enrichment system, Altitude Compensator on some models, and the Throttle Position Solenoid for the new catalytic converter equipped cars.

In 1976, Chrysler introduced Lean Burn ignition and the TQ was modified to produce and run on a very lean air/fuel mixture. An external idle stop switch and throttle position transducer were added. In 1978, the TQ bowl vent was modified with the addition of an electric Bowl Vent solenoid. An additional rear base port for the vent hose replaced the bowl vent port. The fuel inlet moved to the rear center of the carburetor from the previous rear side location. Lean Burn became Electronic Spark Advance (ESA) in 1979. The very lean mixture idea was abandoned, but the electronic control of the ignition advance was retained. Hidden mixture screws were a feature starting with some 1980 model TQs. 1981 introduced a riveted cover for the choke pull-off linkage to prevent tampering and the oxygen feedback solenoid on some models. Idle Enrichment and Altitude Compensator was not used on feedback models. 82-84 did not change much more in a major way. The canister purge was eliminated by 84 in some applications and a power brake port was added to the rear base.

After 1984, Chrysler stopped using Thermo-Quads. Instead, the Rochester Quadrajets were used through 1989 on cars and until 1988 in trucks when Electronic Fuel Injection replaced them. Carter continued to supply the fuel pumps for the Quadrajets equipped vehicles. Although Chrysler was the

primary manufacturer to use the TQ, International Harvester (IHC) used them in the late 70s and Ford used them in 1974.

The Thermo-Quad was available with two primary throttle bore sizes, 1-3/8" and 1-1/2". Flow ratings (CFM) vary depending on the source, but the TQs with the 1-3/8" bores are listed as 750-800 CFM and those with the 1-1/2" primary throttle bores are rated at 800-850 CFM. All TQs have the 2-1/4" diameter secondary throttle plates. The primary bore size depended on application. In general, all 78 and later 318s and 360s and all 340s had the smaller bore. Earlier 360s varied depending on application, most 400s and all 440s had the large bore. The 9000 series have the small primary bore and were rated by Carter at 800 cfm. Later TQs (ie, Lean Burn and ESA applications, feedback systems) are quoted with less flow ratings, but this is due to the control of the carburetion system, not the inherent flow capability of the basic carburetor. The internal metering is set for leaner running conditions for Lean Burn. Either bore size can be tuned to run well on most engine combinations. The smaller bore offers a slight increase throttle response but less overall flow. The different bore sizing, ie. spreadbore, is an aspect that can lead to increased fuel economy while delivering similar wide open throttle (WOT) performance to an equivalent standard bore configuration. The adjustability of the TQ and the spreadbore configuration allows the use of a large CFM carburetor on a small displacement engine.

The TQ gets its name from the phenolic resin main body. This is "sandwiched" between the aluminum bowl cover assembly and the lower throttle flange assembly. The plastic body keeps the fuel ~20 degrees cooler than an all metal carb in the same environment, leading to less percolation problems and increased performance due to a denser charge. The TQ is a metering rod based carburetor like other Carters (AFB, AVS, BBD). The primary jets are housed in the plastic body, the primary metering rods are suspended from the cover mounted step-up piston assembly into the jets (in the 71 TQ and the CS, the primary jets are also housed in the cover).

Engine vacuum (related to load) controls the position of the metering rod in the jet, metering the fuel flow. The secondary jets are suspended from the cover. Secondary flow is controlled by variable venturi effect in the secondary bores. The TQ secondary throttle plates are controlled by direct mechanical linkage, air flow is controlled by a secondary, spring tension resisted, air valve. The valve is further controlled and damped by the choke pull-off diaphragm.

The OEM TQs have a divorced choke (73-up with electric assist in most applications), the 9000 series have an integral electric choke, and the CS were equipped with a manual choke. All OEM TQs and later CS have screw-in jets. Early CS retained the jets via O-rings.

#### Identification:

- - - - -

To identify TQs, the model number is stamped on the lower left rear bolt flange. Earlier TQs also had a tag under one of the front bowl cover screws, later ones have a bar code sticker on the bowl cover with the Carter model and/or a Chrysler part number. International Harvester TQs also have a tag under a front bowl cover screw.

Additional numbers will be found on the carburetor sections. These numbers are not used for TQ identification, but some can be used to relate one casting to the other (note that parts with the same casting number may be machined differently). The upper bowl cover has the casting number on the top, right of center rear: 6-XXXX (example: 6-2141, 6-2080, 6-2024). The bowl has the casting number molded on the bottom of the right bowl near the front, it is difficult to see with the throttle base on the carb: 0-XXXX (example: 0-2511A, 0-1823, 0-2709A). The throttle base has the casting number on the right upper side in a small recess: 1-XXXX (example: 1-2357, 1-2294, 1-2967). More numbers will be found ink stamped, cast or stamped in various areas. Moreover, numbers are usually stamped below the model number on the lower left rear bolt flange. The model number consists of four digits, usually followed by an 'S' (ie. 6318S). The model number is the primary and documented identifier.

The 71 OEM units can be identified externally by the mixture screws which protrude at an angle from the base, in the same plane as the base, later units protrude perpendicular to the base plane, but angle upwards from it. Note: some 1980 and later units have hidden mixture screws. The Competition Series have raised pads on the upper bowl cover for a label. Also, the CS have minimal external attachments, such as the lack of a PCV port. The mixture screws are similar to the 71 OEM TQs.

The fuel inlet on the CS and the 78-84 OEM units was located in the rear center and the 71-77 OEM and 9000 series have the fuel inlet on the right rear side. The aftermarket 9000 series were available in 4 models: 9801, 9811, 9800, 9810. The 9801, 9811 have Chrysler linkage (9801/9811 is EGR capable). Note: later OEM TQs model number started with a 9 as well, but are not to be confused with the aftermarket 9000 series.

TQs with 1-3/8" primary throttle bore will have '2-315' stamped on the throttle plates. 1-1/2" units will have '2-314' stamped on the plates. All secondary plates are stamped with '2-312'.

---

#### Subsystems...

---

This section briefly describes the primary Thermo-Quad subsystems that are readily accessible and the various attachments for emissions. For detailed theory of operation of the subsystems or general operating functions such as the low and high speed metering circuits, refer to the references listed in the References section, specifically the Carter Thermo-Quad service manual. See the Service Parts Information section for details on parts and part numbers.

- Jets: jets are contained in the primary and secondary circuits, one for each barrel. Early CS units had press-in jets retained by o-rings. CS and 71 TQs have the primary jets in the upper bowl cover. All other TQs have screw-in primary jets in the main body. All TQs have the secondary jets mounted in the upper bowl cover. All jets have a part number prefix of 120-. 72 and later TQs usually have the part suffix stamped on the jet, primaries: 4XXX, secondaries: 5XXX (or 120-5XXX). The XXX denotes the size, example: 4098 = 0.098", 5137 = 0.137". CS and 71 TQs have part number suffixes of 3XX or 3XXX.

- Metering rods and step-up: metering rods meter the fuel through the

primary jets. They are essentially controlled by engine vacuum and a mechanical link, step-up cam/lever, connected to the primary throttle shaft. Many variations of metering rods were available through the years. The depth of pre-76 models could be adjusted to tune, ( primarily ), cruising condition flow via a screw adjustment. Some later models retained this feature, but starting in 1980 may have the adjustment locked via a collar. Metering rods have three steps for metering, economy, midrange, power. They are usually stamped with a part number, 75-XXXX or XXXX where the XXXX defines the step sizes. The CS and 71 TQs have numbers 16-XXX.

- Floats: TQs are a single fed, dual inlet, dual bowl carburetor. One bowl feeds each carb half, ie. one primary and one secondary. The dual bowl arrangement is contained in the phenolic main body. Dual floats and dual inlet valves are employed. Early TQs used brass floats. Later models (73-74 and later) use nitrophenyl floats. All OEM TQs are equipped with needle & seat number 25-1086 (0.0935" orifice).

- Accelerator pump: the accelerator pump is located on the left front and feeds from the left fuel bowl. The pump is activated by the left side throttle bracket. There is some stroke adjustability at the upper lever. The fuel is transferred via a plastic tube internally to the squirter which resides above the primary venturi. Later models have two adjustment holes instead of three, and perform a two stage pump that add additional fuel as the secondaries open. Three accelerator pump clusters (squirters) were available.

- Secondary air valve: TQ secondary throttle plates are mechanically linked to the primary on the left side. As the plates begin to open, the secondary air valve senses the opening and begins to open to provide air flow which starts fuel flow from the secondary jets. The initial opening and rate is determined by a counteracting tension spring inside the cover. The opening is additionally regulated and dampened by the choke pull-off assembly. The air valve is contoured and the movement provides a variable venturi effect. A secondary fixed baffle is mounted below the air valve. Total air valve movement is limited by a protruding tab. The counteracting spring tension is adjustable via a slot/lock screw on the left side to tune the rate. Carter designed a special tool to facilitate this adjustment. Some of the CS TQs used an adjustment and lock screw arrangement similar to the AVS.

- Choke: OEM TQs use a divorced, manifold mounted choke. Exhaust crossover heat operates the thermostatic spring contained in the choke well. Most 73-84 TQs were electrically assist heated. The electric control is via a small module mounted to the intake or right head. This unit times the assist based on temperature and time and receives power from the ignition run circuit. 9000 series have an integral choke assembly identified by the black, circular plastic thermostat housing. This unit is electrically controlled. CS units have a manual choke. Choke action is accomplished via the choke plate in the top of the primary side.

- Mixture screws: screws used through 1976 had a 20 degree taper at the seat. In 1977, this was changed to 12 degrees to reduce adjustment sensitivity. Some ~77-79 TQs also contained internal restrictors to limit adjustment. Plastic caps with tabs to limit adjustment were also installed on several models. Many 1980 and later TQs had the base redesigned to enclose the mixture screws so they could be 'capped' via

plugs after factory setting.

- Choke pull-off: All TQ models. This performs the vacuum kick pull-off function for the choke at initial cold engine start. It is also used to regulate and dampen secondary air valve opening. Mounted on the right rear base under a mounting bolt and screw. Connects to the rear vacuum port, right, color code gold. The CS has the diaphragm for secondary air valve control only.

- Hot Idle Compensator: Some models are equipped with a compensator to allow extra air into the mixture during high heat conditions. If equipped, it is located on the bowl cover over the secondary air valve. High temperatures can create an over-rich idle condition, and this compensates for it, by allowing extra air flow when it opens.

- Idle Stop Solenoid (ISS): 71-76. Used to set the idle higher than the basic curb idle screw for emissions reduction and to allow further closure of the throttle blades at engine shutdown to prevent 'deiseling' or 'run-on'. Mounts on a bracket retained by base mounting bolt and screw on the right side for 72-76. 71 mounted to the left side of the intake under the carb linkage.

- Exhaust Gas Recirculation (EGR) port: 73-84, not used in some 76-81. Some located on the main phenolic body as a tap into the venturi for vacuum signal. Venturi port is connected to a vacuum amplifier if used. Some models use a ported signal via a base port on the right front. Base ports color coded black. Venturi ports are brass.

- Evaporative Control System (ECS) port:: 73-84. Used to purge the ECS charcoal canister of collected gas fumes from the bowl vent and fuel tank vent. Color coded red.

- Idle Enrichment (IE) system: 75-81. This is a driveability enhancement. It supplements the choke function by allowing an even richer mixture during the warm up period to improve driveability. This will appear as a small attachment on the front bowl cover that has a vacuum port that connects to a coolant temperature sensor (CCIE), then to manifold vacuum with bleed. It will also be plumbed into the EGR delay timing system.

- Altitude Compensator or Alcomp (Alc): 75-81. This is another driveability enhancement. It appeared on most California and Federal high altitude cars. It appears as a small cylinder attached to the front of the Idle Enrichment system at the front of the bowl cover. A small bellows inside reacts to altitude changes and alters the air flow in the high speed metering circuit. This improves driveability and reduces emissions by maintaining a correct fuel/air mixture. Note: later vehicles may be equipped with a remote Alcomp sensor (fenderwell) to signal the feedback solenoid controller to compensate.

- Bowl Vent (BV) solenoid: 78-84. In an effort to completely capture all fuel bowl evaporative emissions, the standard bowl vent was redesigned with a two way valve and holding solenoid at the rear of the carburetor. When the engine starts, manifold vacuum pulls the valve rubber 'puck' down, opening the bowl to the canister port. The solenoid is connected to the ignition run circuit and holds the valve open during low vacuum periods while running. When the engine is shutdown, the valve releases and

reseals the float bowl. Connects to rear base port, color code gold.

- Ground Switch: 76-84. This appeared with Lean Burn (LB). It signals the

computer that the throttle plates are at idle position. Later models with solenoid idle stop combined the functions. It is located on the bracket on the right front. A throttle shaft attachment contacts it.

- Throttle Position Transducer (TPT): 7766-81. This appeared with Lean Burn.

It signals the position and movement rate of the throttle to the computer. It is attached via the same bracket as the Ground Switch.

- Solenoid Idle Stop (SIS): 81-84. Used to set the idle higher than the basic curb idle when additional heavy accessory load (ie. rear window defogger, air conditioning) is placed on the engine. Mounts on a bracket on the right front.

- Dashpot: Some models, primarily truckkss, may have a dashpot to slow throttle closing rate to reduce stalling. Mounted on a bracket on the left front.

- Vacuum Pull-Off Choke: A few models mmaay have an additional pull-off mounted on the left rear. This connects to manifold vacuum via a control switch in the vacuum plumbing. It prevents choke operation after engine warmup.

- Throttle Position Solenoid (TPS): 75--llater, some models. Mounts in the same place as the idle solenoids and is used to delay full throttle closure at deceleration to prevent a momentary rich condition thus protecting the catalytic converter(s).

- Vacuum Throttle Positioner (VTP): 75--llater, some models. Mounts in the same place and performs the same funcion as the Throttle Position Solenoid. Also serves as a speed sensor.

- Pulse Solenoid, Oxygen Feedback Controoll (O2): 81-84. Mounts on the front of the bowl cover (where the IE module mounted earlier). This solenoid is used to control the air/fuel mixture via varying duty cycle pulsing from the control computer based on feedback from exhaust, engine, and ambient sensors.

- Fuel bowl inserts: some later models hhad an insert in the fuel bowls to reduce the bowl fuel volume.

- Choke pull-off cover: many 81-84 modeells have a cover to prevent field adjustment of the pull-off.


---

#### Port Diagram

---

This section contains a diagram and notes to identify the various hose port connections on the Thermo-Quad. Different port configurations were used throughout the years. The diagram is a representation of the throttle base, top view. It is drawn with all possible ports. The label notes identify the ports and their general usage. Some ports are

contained in the bowl or bowl cover. These are also identified. The ports are labeled by (x)...descriptions follow the diagram.

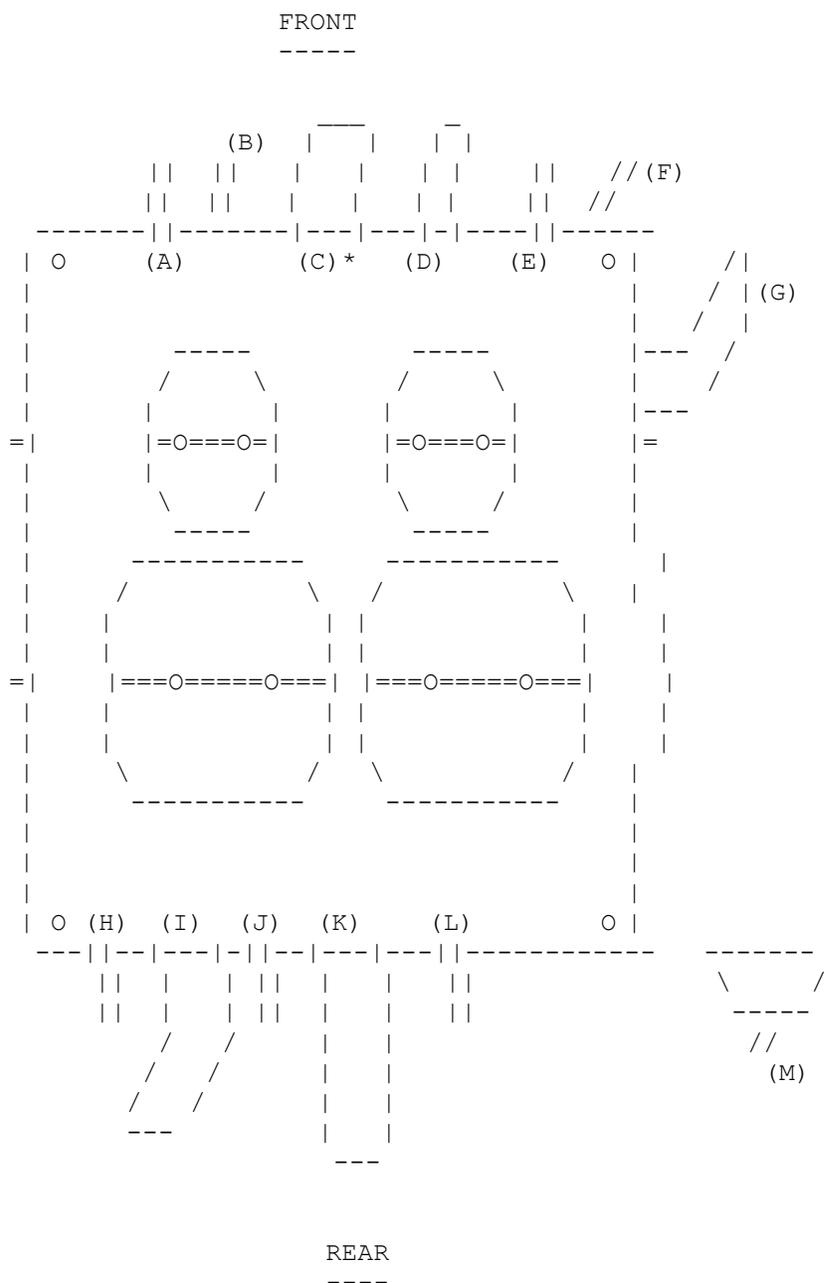

- (A) Distributor Vacuum Advance (black,, 71-75, some 76-84), 5/32".
- (B) Idle Enrichment (IE) (gold, 75-81 some models), 5/32".
- (C) PCV (gold, 71-84), 11/32". \* Note:: angled on 80-84 models.
- (D) Canister Purge (ECS) (red, 73-82),, 1/4".
- (E) EGR (gold) or Air Pump (blue), 5/32".
- (F) EGR venturi port (brass), 1/8", {llocated on phenolic float bowl}.
- (G) Bowl Vent (gold, 71-77), 11/32", {(llocated on the upper bowl cover)}.
- (H) Air Cleaner Heated Air Temp Sensorr (black, 78-84), 5/32".
- (I) Power Brake Tube (gold, 81-84), 11/32".

- (J) Air Cleaner Heated Air Temp Sensor (black 71-77), 5/32",  
Bowl Vent Solenoid Vacuum Tube (gold 78-84), 5/32".
  - (K) Canister Bowl Vent Tube (gold, 78--884), 11/32".
  - (L) Choke Pull-off (gold, 71-84), 5/322".
  - (M) Choke Pull-off Diaphragm (natural,, 71-84), 5/32", {bolts to TQ base}
- some other vacuum attachments were used, ie. secondary pull-off and vacuum throttle positioner...these (like item M) were external to the TQ.

-----  
 Choices and Adaptations:  
 -----

Choices:

-----  
 Chrysler used the TQ from 1971-1984. Ford used it in 1974 on some 460s and International Harvester used it in 74, 75, 79, 80 on 345/392 engines. The CS series was available from 69--73. The aftermarket 9000 series was available from ~76--late 80s. The best OEM years to locate are 72-75. TQs from this period have the least emission control add-ons. The 71 OEM TQ performs well and has minimal emission considerations. Due to its air metered design, it is unlike the later TQs and few parts are still available for it. The CS TQ was not intended for street use, thus it lacks provisions for many street engine items. Carter released the 9000 series in the latter 70s. It is a good unit for most applications. It is the same design as the OEM TQ with minimal emissions devices. In 76, Chrysler introduced Lean Burn (ELB) which evolved into Electronic Spark Advance (ESA). The 76-80 carburetors can be adapted for use in earlier vehicles. Many will need idle screws and vacuum ports added. Most 78 and later TQs use a more complex bowl venting arrangement. The IHC carburetors are fairly simple like pre-76 Chrysler TQs. 1980 TQs began receiving a pulsing solenoid as part of an oxygen sensor feedback system to allow more computer control of the mixture. The TQs from this period are the most complex and least desirable units.

There were several internal metering and passage changes that occurred over the years for emissions. Most TQs can be tuned to match most applications. The later carbs, however, will need extra adaptation for earlier vehicles.

The Competition Series carbs should generally be avoided except for racing. The aftermarket 9000 series were available in 4 models: 9801, 9811, 9800, and 9810. The 9801, 9811 have Chrysler linkage (9811 is EGR capable). Note: later OEM TQs model number started with 9 as well, not to be confused with the 9000 series. The 9801/9811 is the preferred aftermarket TQ.

Because TQs are out of production (since 1985), new parts are scarce except for common service items. Kits are available through Carter, Hygrade, KEM, etc. Floats, choke pull-offs, choke assemblies are also available. Tuning parts, ie. jets, rods, are no longer available new. Carter did make rod/jet kits (Strip Kit), but they are discontinued. Because replacement jets and rods are no longer available, tuning can be limited, unless a supply of used rods and jets is obtained. Many variations were used in the various applications over the years. Jets and rods can be modified. The carburetors are easy to rebuild. TQs usually work well with just normal service adjustments.

Adaptations:

- - - - -

Note: for tuning basics and repair procedures see the References section for possible information sources. This section considers basic and emission subsystem adaptation possibilities.

- TQ on 'squarebore' intake: the TQ requires a spreadbore intake manifold. It can be adapted to a squarebore type via the use of an adaptor. Several companies make these (see Service Parts section). Some performance can be lost compared to a comparable spreadbore intake depending on the quality of the adaptor and the transition area. Vacuum leaks can be an issue too.

- 1-3/8" vs. 1-1/2": The TQs have two different primary bore sizes. These units can be interchanged. The smaller bore will yield slightly better throttle response, but less overall flow.

- Jets/rods: The jets and metering rods can be changed on the TQ to tune its performance. Many sizes were available. See the Service Parts section for sizing information. Many later model TQs were lean on the primary side. Increasing primary jet size and/or reducing metering rod size will richen the primary side. Secondary jets can be changed as well. If replacement units are not available, jets may be drilled to increase size. Rods may be filed to reduce size. Solder and drilling/filing can be used to reverse this to some extent.

- Floats: Early TQs had brass floats. By 1975, all TQs used nitrophenyl floats. Over time, the nitrophenyl floats can absorb gas and sink, allowing fuel levels to be too high. The floats should weigh 7.4-8.0 grams. Carter no longer services brass floats, but several sources are available (see the Service Parts Information section).

- Accelerator pump clusters (squirters):: The accelerator pump clusters were available in various sizes. Drilling may be used to increase the orifices to tune pump fuel delivery.

- Mixture screws: the screws are readily accessible on 71-79 TQs. Some of these had plastic caps to limit travel. The caps can be removed. Some ~77-79

contained internal restrictors to mixture adjustment. These restrictions are in the base mixture path from the idle circuits and could be opened if needed. Note: mixture screws prior to 1976 had a 20 degree taper at the seat and cannot be interchanged with 77 and later 12 degree screws. 1980 and later TQs may have hidden screws. The base enclosed the screws in cast protrusions under press-in caps. The caps may be removed for mixture adjustment.

- Interchanging bases, fuel bowls, upper bowl covers: The three main TQ sections are matched for each application. Most will interchange mechanically, but flow and metering characteristics may not match. The sections have casting numbers that will allow some interchange identity, but the casting machine work for applications may vary.

- Evaporative Control System (ECS): 73 and later will have an extra base port for the charcoal canister purge. This is not a parasitic device and may

be retained without decreasing performance. The bowl vent is plumbed to the canister to vent fumes. The purge pulls these fumes and those collected from the tank. The purge port can be capped to disable it.

- Exhaust Gas Recirculation (EGR): EGR occurs outside of the carburetor, but tuning and vacuum source provisions are incorporated into the various TQs used on EGR equipped vehicles. The tuning is usually not a major issue. TQs may provide a venturi or a front base port for EGR vacuum signals. If EGR is not used, these ports can be capped.

- Idle Enrichment system (IE): this system is a drivability enhancement. It allows a richer mixture during the warm up period to improve driveability. It supplements the choke function by blocking part of the air bleed to enrich it. The TQ with IE will have a small attachment on the front bowl cover that has a vacuum port that connects to a coolant temperature sensor (CCIE), then to manifold vacuum. It is also integrated into the EGR delay circuit. The IE port can be retained or capped (if capped, the carb behaves normally).

- Altitude Compensator (Alcomp...Alc): This device alters the high speed metering circuit by sensing atmospheric pressure. It mounts to the same area as the IE system at the front of the bowl cover. This system is also a drivability enhancement, which also reduces emissions, by allowing the TQ to compensate for elevation. It could be disabled by blocking the air passage ports (or the front vent pipe) to allow a normal full rich condition for the high speed circuit.

- Solenoid Bowl Vent (BV): Most 1978 and later TQs have an electric bowl vent solenoid that replaces the earlier mechanical vent. 72-77 TQs used a linkage actuated bowl mounted vent that fed to the ECS charcoal canister. 71 TQs actuated the same way, but vented to the oil breather or the atmosphere.

The later units vented through the rear base. The vent mechanism closes to vent to the ECS canister with the engine off. When started, engine vacuum opens the vent and the electric solenoid is powered to hold the vent open during low vacuum conditions. The electric power is supplied by the ignition run circuit. While running, or off-idle for earlier TQs, the bowls vent inside the air cleaner. Vents should be retained for all types. The solenoid bowl vent could be redesigned to eliminate the solenoid by adapting earlier parts, but the remachining effort is not worth the result. The solenoid bowl vent system can be retained by wiring into the ignition run circuit if adding to an earlier vehicle. If the ECS canister is not used the port can be vented to the atmosphere like 70 and earlier carburetors were done. A protective screen over the port can be used.

- Oxygen Feedback Pulsing Solenoid (O2):: Most 1980 and later TQs will contain an oxygen feedback controlled, pulsed solenoid in place of an IE module. The solenoid is variably pulsed by the control computer based on the signal it receives from the exhaust mounted sensor. The solenoid alters the variable air bleeds by inputting more or less air based on computer signal duty cycle. If the solenoid is disconnected, the air bleeds will allow a full rich condition. Tuning with this in mind, this TQ could potentially be used in a non-control/feedback vehicle.

- Idle Stop Solenoid (ISS): the idle stop is external to the TQ and is used

to prevent engine run-on. It can be retained, disconnected, or reused for other functions such as compensating for engine loading (ie. air conditioning) like a SIS unit.

- Solenoid Idle Stop (SIS): the idle stop is external to the TQ and is used to compensate for engine loading (ie. air conditioning). It can be removed if not needed.

- Throttle Position Solenoid (TPS): the solenoid is external to the TQ and is used for catalytic converter protection. It can be removed if not needed.

- Vacuum Throttle Positioner (VTP): the positioner is external to the TQ and is used for catalytic converter protection and/or a speed sensor. It can be removed if not needed.

- Throttle Position Transducer (TPT): the positioner is external to the TQ and is used to signal throttle position and movement rate to the computer. It can be removed if not needed.

- Ground Switch: the switch is external to the TQ and is used to signal throttle closed to the computer. It can be removed if not needed for a computer or for idle adjustment.

- Idle screw adjustment on ELB and ESA TQs:  
Lean Burn carburetor idle speed is controlled with the curb idle adjustment screw that contacts the "throttle closed switch contact". This contact signals the Spark Control Computer that the engine is at idle, or not. The contact is mounted on a bracket on the passenger side of the carburetor. There is also a transducer, but it is to sense throttle position and opening rate. Some had the conventional idle screw based on application. There are two approaches to the idle adjustment...

1) retain the "throttle closed switch contact" bracket (on the passenger side)

and adjust the idle there...this was the factory curb idle adjustment.

2) Drill and tap the boss for the conventional idle screw. Drill the boss perpendicular and near the center, but align the hole with the throttle bracket extension. The factory screw size is 10-32. This approach yields an idle adjustment screw like earlier TQs had.

- Adding vacuum advance port to ELB and ESA TQs:

Many Lean Burn carburetors lack a vacuum advance port because advance was controlled by the ELB computer. The port may be added to provide a vacuum advance signal for a conventional non-ELB/ESA distributor system. The vacuum advance port is somewhat tricky and is best performed by comparison

to an earlier throttle base that has the factory port. Using ~5/32" drill bit, drill the throttle base where the vacuum port existed on previous units....drill into the open (roughly square) opening between the outside and the throttle bore. This will accommodate the vacuum fitting. Then, using ~1/16" drill bit, drill two holes just above the throttle plate into the same square opening from the throttle bore side one hole adjacent to the other parallel to the throttle plate. Then,

using a knife or small screwdriver, blend the holes together into a slot. This serves as the off-idle transfer slot to feed the vacuum port. Press a short length of 5/32" pipe or an old fitting into the outside hole. Vacuum advance is now available. Using another base with the port as a guide will ensure proper placement of the transfer slot. Misplacing the vacuum idle transfer slot can cause an off-idle stumble and will necessitate additional tuning or replacement.

- Tamper-proof choke pull-off: TQs with this feature have a pull-off with the enclosure attached. These can be replaced with an earlier standard pull-off to allow choke tuning.

- Fuel bowl inserts: these may be removed to allow full bowl volume.

#### Other Considerations:

-----  
The TQ can possess the same problems as other carburetors. Some of the features of the TQ can create problems specific to its design. Common problems can usually be remedied with standard repair and tuning practices. Some specific considerations are discussed in this section.

- Main jet wells: The primary jets in 7722 and later TQs are screwed into a threaded insert in the fuel bowl bottom. This area is connected via a small plastic channel to the internal fuel pickup area. There is one channel for each jet. These channels are attached to the main body with an epoxy adhesive. The epoxy can weaken and begin leaking with age. Correction can be made by reattaching the wells with new epoxy (J-B Weld has been found to work). Remove the wells and the old epoxy. Clean the area and reattach the wells with a small bead of epoxy. Remove any surplus epoxy that may interfere with reassembly.

- Bowl warpage: Due to the phenolic material construction, the fuel bowl can warp. The area most prone to warpage is the upper edge corner of the bowl at the rear. Correction can be made by resurfacing the upper surface. A large flat file can be used to resurface for corner warpage or other irregularities. Warpage of the bottom (unlikely) may require replacement due to its configuration.

- Bowl breakage: Severe breakage may require replacement of the fuel bowl. Small breaks and cracks may be repaired with a fuel-resistant epoxy. The bottom surface has tabs for gasket location. If these break, repair is not required if the break does not extend into the bowl. Small breaks around the screw holes do not require repair if the break does not extend into other areas.

- Idle transfer slot: If the primary throttle plates are opened too far in an attempt to set the idle speed, the idle transfer slot may be exposed to the air flow. This can result in an off-idle hesitation. Correction can be made by drilling a 1/16"-1/8" hole in the forward half of each primary throttle plate. The holes allow sufficient air flow for speed setting without exposing the idle transfer slot.

- Step-up piston spring: The step-up piston spring resists vacuum pull on the piston. In cases where idle vacuum is too low to allow stable holding of the step-up piston, the spring may be trimmed to reduce its force.

- Commercial rebuilders: Carburetors that are mass rebuilt by commercial

rebuilders have their useful service life shortened or ended. This usually stems from mixing parts, bad service procedures, and cleaning by tumbling or blasting. Tumbling and blasting removes the factory finishes. This leads to accelerated wear and corrosion problems. In the case of the TQ, the factory linkage was cadmium or irridite finished. The throttle shafts were Teflon coated. Tumbling or blasting removes these finishes and will lead to corroded sticking linkages and binding or leaky shafts. The TQ phenolic fuel bowl can be damaged by tumbling or blasting. Jets, rods and internal orifices are further damaged by these processes. Mixed parts without proper analysis can result in a poorly performing or useless unit. A carburetor from a rebuilder of this nature requires careful examination to determine its future usefulness.

-----  
Numeric Listing...  
-----

Listing Notes:  
-----

This section attempts to identify most Thermo-Quads by the Carter model number. There were a multitude of models available with many configurations to accomodate all the applications and varying regulations and conditions. The listing identifies the models by primary application and year model. There may be some variation in date availability and multiple application models. Most of this is reflected. Abbreviations are used to highlight specific features, particularly with California and Federal based emissions and some major emission subsystems.

Known jet and metering rod information is included for the earlier years as this was documented by Carter and Chrysler. Later years were not documented as well. A kit reference number is given for each carb. The kits are referenced in the Service Information section. The Carter 'Zip Kit' is the primary reference. Some conflicts arise in the documentation. Carter information is used where conflicts occur.

All primary and secondary jets are prefixed with 120- for TQs. All metering rods are prefixed with 75- for 72 and later OEM and 9000 series. CS and 71 TQ rods are prefixed with 16-. The prefixes are omitted from the listing to save space.

The 'Kit' field contains a code corresponding to a row code under the carb kits in the Service Parts section. The code is referenced to the Carter rebuild kit or "Zip Kit". Some competitor kit numbers have been provided. These numbers have been cross-indexed to Carter's. The cross-index is not 100% due to some manufacturer variances. The most common cross-index has been chosen in these cases.

Note that most TQ model numbers had an 'S' suffix. Many will also appear with a 'TQ' prefix. These were left out of the list to save column space. Where known, Chrysler part numbers are also listed in parenthesis.

Because the Rochester Quadrajets replaced the Thermo-Quad in 1985, a brief listing of Quadrajets follows the TQs as reference.

Abbreviations:

- - - - -

AT = Automatic Transmission  
 MT = Manual Transmission ( No reference means both transmissions )  
 Pri. = Primary Jet  
 Sec. = Secondary Jet  
 Rod = Primary metering rod  
 Bore = Primary throttle plate diameter in inches, All secondaries are 2-1/4"  
 HP = High Performance  
 CA = California application; generic for CA, N95  
 F = Federal application ( No reference means both Federal and California.)  
 Can = Canada application. Typically, Canada used Federal carbs except noted.  
 LD = Light Duty  
 MD = Medium Duty  
 HD = Heavy Duty  
 LB = Lean Burn, ESA. Noted on 76's. After 76, most F cars were LB (N92, N94).  
 IE = Idle Enrichment  
 Alc = Altitude Compensator. Few noted, most CA and last years had Alc (N96).  
 HA = High Altitude  
 BV = Bowl Vent valve  
 O2 = Oxygen feedback solenoid

Thermo-Quad Listing:

- - - - -

Model	Application	Pri.	Sec.	Rod	Bore	Kit
4846S	Competition Series	331	341	615	1-1/2	8
4846SA	Competition Series	3080	3116	615	1-1/2	8
4847S	Competition Series	331	341	616	1-1/2	8
4847SA	Competition Series	3089	3116	616	1-1/2	8
4972	71 340 MT (3512820)	3074	3125	655	1-3/8	6
4973	71 340 AT (3512821)	3074	3125	655	1-3/8	6
6090	72 400 AT F (3614139)	4095	5137	1937	1-1/2	1
6138	72 340 MT F (3614122)	4095	5137	1940	1-3/8	1
6139	72 340 AT F (3614123)	4095	5137	1940	1-3/8	1
6140	72 400 MT F (3614138)	4095	5137	1939	1-1/2	1
6144	72 340 AT Export	4095	5137	1950	1-3/8	1
6165	72 400 MT CA (3614172)	4095	5137	1938	1-1/2	1
6166	72 400 AT CA (3614173)	4095	5137	1938	1-1/2	1
6318	73 340 MT F (3698327)	4098	5137	1962	1-3/8	1
6319	73 340 AT F (3698328)	4098	5137	1966	1-3/8	1
6320	73 400 HP MT F (3698332)	4098	5137	1965	1-1/2	1
6321	73 400 HP AT F (3698333)	4098	5137	1966	1-1/2	1
6322	73 440 & Truck AT F (3698334)	4098	5125	1966	1-1/2	1
6324	73 440 HP AT F (3698336)	4098	5125	1966	1-1/2	1
6339	73 340 MT CA (3698339)	4098	5137	1962	1-1/2	1
6340	73 340 AT CA (3698340)	4098	5137	1966	1-1/2	1
6341	73 400 MT CA (3698342)	4098	5137	1965	1-3/8	1
6342	73 400 AT CA (3698343)	4098	5137	1966	1-3/8	1
6394	72-73 340 AT Export				1-3/8	1
6410	73 440 & Truck AT CA (3698319)		4098	5125	1966	1-1/2
6411	73 440 HP AT CA (3698329)	4098	5125	1966	1-1/2	1
6446	M-440 Chrysler Marine (3698397)				1-1/2	1

6452	74 360 HP MT F (3751433)	4098	5143	1962	1-1/2	1
6453	74 360 HP AT F (3751434)	4098	5143	2005	1-1/2	1
6454	74 360 HP MT CA (3751435)	4098	5143	1962	1-1/2	1
6455	74 360 HP AT CA (3751436)	4098	5143	2005	1-1/2	1
6456	74 400 HP MT F (3751439)	4098	5143	1966	1-1/2	1
6457	74 400 HP AT F (3751440)	4098	5143	1966	1-1/2	1
6459	74 400 HP AT CA	4098	5143	1966	1-1/2	1
6460	74 440 AT F early (3751443)	4098	5137	1966	1-1/2	1
6461	74 440 AT CA early (3751444)	4098	5137	2005	1-1/2	1
6462	74 440 HP AT F early (3751445)				1-1/2	1
6463	74 440 HP AT CA early (3751446)					1-1/2
1						
6488	74 360 AT CA early (3751451)	4098	5143	1966	1-1/2	1
6489	74 400 AT F early (3751452)				1-1/2	1
6496	74 400 AT CA	4098	5143	2005	1-1/2	1
6503	74 400 AT Export				1-1/2	1
6518	H-440-3 Chrysler Industrial				1-1/2	1
6545	74-77 440-1,-3 Truck F (3751472)	4098		5137	2024	1-1/2
1						
6550	74 345, 392 AT IHC (448582C91)				1-3/8	1
6551	75 345, 392 AT IHC CA (459642C91)				1-3/8	1
6568	74 460 AT Ford CA (D4AE-BC)				1-3/8	7
6590	74 392 IHC (451872C91)				1-3/8	1
6592	74 345, 392 MT IHC (451916C91)				1-3/8	1
6614	74 ???	4098	5143	1966	1-3/8	-
6615	74 440-1 Truck AT	4098	5137	2024	1-1/2	1
6616	74 440-1 Truck AT CA	4098	5137	1966	1-1/2	1
9000	74 318 Export (3751474)					1-3/8
1						
9002	75-76 360 HP AT F IE (3830529)		4095	5143	1998	1-1/2
2						
9004	75 360 AT CA IE early (3830531)		4095	5125	2086	1-1/2
2						
9008	75 400 AT CA IE early (3830535)		4098	5143	1965	1-1/2
2						
9009	75 440 AT F IE (3830536)	4098	5137	2109	1-1/2	2
9010	75 440 AT CA IE (3830537)	4098	5137	1965	1-1/2	2
9011	75 440 HP AT F IE (3830538)	4099	5137	2103	1-1/2	2
9012	75 440 HP AT CA IE early (3830539)	4098		5143	1965	1-1/2
2						
9013	74 360 AT CA late (3751420)	4098	5143	1966	1-3/8	1
9014	74 400 AT CA late (3751419)	4098	5143	2005	1-1/2	1
9015	74 440 HP AT late (3830415)	4098	5137	2005	1-1/2	1
9016	74 440 HP AT CA late (3830416)		4098	5137	1966	1-1/2
1						
9017	74 440-1 Truck AT CA (3830417)	4098	5137	1966	1-1/2	1
9019	72-74 ???				1-3/8	1
9020	72-74 ???				1-3/8	1
9022	74 360 Truck AT CA (3830401)	4098	5143	1966	1-3/8	1
9023	74 440 AT F late (3830403)	4098	5137	1966	1-1/2	1
9024	74 440 AT CA late (3830404)	4098	5137	2005	1-1/2	1
9025	74 440-1 Truck AT F (3830405)	4098	5137	1966	1-1/2	1
9027	75 392 IHC F (461280C91)				1-3/8	1
9028	75 392 IHC CA (461281C91)				1-3/8	1
9034	75 440-1 Truck MT F (3870944)	4099	5143	1965	1-1/2	1
9035	75 440-1 Truck MT CA (3870945)	4100	5125	2110	1-1/2	1

9036	75-76 440-1 Truck AT CA (3870946)	4100		5125	2110	1-1/2	
1							
9046	75 400 AT F IE early (3830554)	4099		5143	1965	1-1/2	
2							
9047	76 360 AT F CA IE					1-1/2	2
9049	74 440 HP AT CA late (3830864)	4099	5143	1965		1-1/2	2
9050	75 400 AT Can IE (3830561)	4099	5143	1965		1-1/2	1
9051	75 440 AT Can IE (3839562)		4095	5125	2144		1-1/2
2							
9052	75-76 440 HP AT Can IE(3830568)		4095	5137	2024		1-1/2
2							
9053	75 400 AT CA IE PDC-SW(3830570)		4100	5143	1965		1-1/2
2							
9054	75-76 400 HP AT F IE (3830569)		4098	5137	2005		1-1/2
2							
9055	76 360 AT CA IE (4006624)	4096	5125	1962		1-3/8	2
9056	75 400 SW AT CA IE	4099	5143	2145		1-1/2	2
9057	76 400 AT Can IE	4099	5143	1965		1-1/2	2
9058	76 440 AT F IE (4006631)	4099	5137	2109		1-1/2	2
9059	76 440 AT CA IE (4006632)	4099	5137	2145		1-1/2	2
9062	76 440 HP AT CA IE	4098	5137	2153		1-1/2	2
9063	75 440 AT CA early	4099	5143	1965		1-1/2	2
9064	76 400 AT LB	4099	5143	1965		1-1/2	2
9065	75-76 ???	4098	5137	2109		1-1/2	2
9066	76 440 HP AT F IE	4099	5137	2103		1-1/2	2
9068	75 400 AT CA late	4099	5143	2145		1-1/2	2
9069	75 440 AT CA late	4099	5143	2145		1-1/2	2
9072	75 360 AT CA late	4099	5143	1965		1-1/2	2
9073	75 440 AT CA late	4098	5137	2145		1-1/2	2
9074	76 400 AT CA (4006642)	4099	5143	2145		1-1/2	2
9076	77 360 HP AT CA IE (4027735)	4092	5137	1938		1-3/8	2
9077	77 400 HP AT F (4027736)	4098	5143	2159		1-1/2	2
9078	77 440 AT F IE (4027737)	4098	5137	2159		1-1/2	2
9080	77 440 HP AT F IE (4027739)	4098	5137	2179		1-1/2	2
9081	77 440 HP AT CA IE	4098	5137	1950		1-1/2	2
9093	77 360 HP AT F CA IE (4027742)	4092	5143	2195		1-3/8	2
9094	76 440 HP AT F (4006648)	4099	5137	2103		1-1/2	2
9095	76 440 HP AT CA (4006649)	4098	5137	2153		1-1/2	2
9096	77 440 Truck AT CA (4041553)	4099	5125	2110		1-1/2	1
9097	76 400 AT LB (4006654)	4099	5143	2086		1-1/2	2
9099	76 400 AT CA late	4099	5143	2145		1-1/2	2
9100	76 400 AT Can late	4099	5143	2144		1-1/2	2
9101	77 440 AT CA IE (4027750)	4098	5137	2210		1-1/2	2
9102	77 400 HP AT F					1-1/2	2
9103	77 400 HP AT F (4027761)	4098	5143	2211		1-1/2	2
9104	78 360 AT F IE BV (4041826)	4092	5110	1940		1-3/8	3
9108	78 400 AT Can Exp (4041836)	4098	5143	2159		1-1/2	3
9109	78 440 AT F IE early (4041830)					1-1/2	3
9110	78 440 AT F HA CA IE (4041831)					1-1/2	3
9111	78 440 AT Can Exp IE (4041837)					1-1/2	3
9112	78 440 HP AT IE (4041832)	4098	5125	2179		1-1/2	3
9114	77 440 AT Can	4098	5137	2159		1-1/2	2
9115	77 360 AT Alc (4027727)		4092	5137	1938		1-3/8
2							
9116	78 440 Truck MD IE CA (4095406)		4098	5137	1950		1-1/2
3							
9117	78 440 Truck HD CA (4095407)	4099	5125	2110		1-1/2	3

9118	78 440 Truck HD (4095423)	4098	5125	2110	1-1/2	3
9119	77 440 HP AT CA (4027770)	4098	5125	1950	1-1/2	2
9123	78 318 Truck MT CA (4095427)	4092	5110	1997	1-3/8	3
9124	78 318 Truck AT CA (4095428)	4092	5110	1997	1-3/8	3
9125	78 360 Truck MT CA (4095429)	4092	5110	1938	1-3/8	3
9126	78 360 Truck AT CA (4095430)	4092	5110	1938	1-3/8	3
9127	77 440 AT	4098	5125	2179	1-1/2	2
9128	79-80 345 AT IHC				1-3/8	4
9134	78 360 AT F HA CA IE (4041856)	4092	5110	1996	1-3/8	3
9136	78 360 Mexico				1-3/8	3
9137	78 318 AT Can Exp (4041858)	4092	5110	1998	1-3/8	3
9140	78 400 AT F (4041861)	4092	5137	1997	1-1/2	3
9147	78 318 AT CA (4041865)	4092	5110	1996	1-3/8	3
9148	78 440 HP AT CA IE				1-1/2	3
9149	78 440 Truck MD AT CA (4095440)					1-1/2
3						
9150	78 440 Truck HD AT CA (4095441)		4099	5125	2110	1-1/2
3						
9151	78 440 Truck HD AT (4095442)	4098	5125	1998	1-1/2	3
9152	78 318 Truck AT LD Can	4092	5110	1997	1-3/8	3
9153	78 440 HP AT CA (4041874)				1-1/2	3
9161	78 440 AT Can Exp (4041879)				1-1/2	3
9172	79 360 Truck LD MD BV IE				1-3/8	3
9173	78-79 360 Truck HD BV				1-3/8	3
9180	78 440 AT F (4041881)				1-1/2	3
9182	78 400 AT F (4041882)				1-3/8	3
9183	78-79 318 Truck BV				1-3/8	3
9185	78-79 318 TruckBV				1-3/8	3
9187	78-79 318 TruckBV				1-3/8	3
9188	78 400 AT Can Exp (4041892)				1-3/8	3
9190	78 440 Truck MD AT CA				1-1/2	3
9193	78-79 360 Truck HD BV				1-3/8	3
9194	78-79 360 TruckHD BV				1-3/8	3
9195	79 318 AT CA IE BV (4095934)				1-3/8	3
9196	79 360 AT F IE BV (4095935)	4095	5110	2210?		1-3/8
3						
9197	79 360 AT Can IE BV (4095936)				1-3/8	3
9198	79 360 HP AT CA IE BV (4095937)					1-3/8
3						
9202	79 360 AT CA IE BV (4095939)				1-3/8	3
9203	79-80 345 AT IHC (1700004C91)	4095	5110	2144	1-3/8	4
9205	79-80 345 AT IHC				1-3/8	3
9207	79 360 Truck HD				1-3/8	3
9208	78-79 360 Truck HD BV				1-3/8	3
9209	79 360 Truck HD				1-3/8	3
9210	78-79 360 Truck HD BV				1-3/8	3
9211	79 440 Truck HD				1-1/2	3
9212	79 440 Truck HD AT CA				1-1/2	3
9213	78 440 Truck HD				1-1/2	3
9214	78-79 440 Truck BV				1-1/2	3
9215	78-79 ??? Truck				1-3/8	3
9216	78-79 318 TruckBV				1-3/8	3
9217	78-79 360 Truck HD BV				1-3/8	3
9218	78-79 360 TruckHD BV				1-3/8	3
9219	78-83 ??? Truck				1-3/8	3
9221	78 440 Truck HD AT				1-1/2	3
9223	78-79 318 Truck BV				1-3/8	3

9224	79 360 Truck LD MD BV IE	1-3/8	3
9225	79 360 Truck LD MD BV IE	1-3/8	3
9226	79 360 Truck LD MD BV IE	1-3/8	3
9227	78-79 318 Truck BV	1-3/8	3
9228	78-79 318 Truck BV	1-3/8	3
9229	78-79 318 Truck BV	1-3/8	3
9230	80 318 AT Can Exp BV (4179033)	1-3/8	3
9232	80 318 AT Can BV (4179035)	1-3/8	3
9234	80 318 AT F BV (4179037)	1-3/8	3
9236	80 360 AT Can BV (4179039)	1-3/8	3
9238	79-81 ??? Mexico	1-3/8	3
9240	79 446 Motor Home AT *	1-1/2	3
9241	79 446 Motor Home AT CA	BV *	1-1/2
3			
9243	80 318 AT Can Exp BV (4179043)	1-3/8	3
9244	80 360 AT F BV Alc (4179044)	1-3/8	3
9245	79 318 AT CA BV (4095495)	1-3/8	3
9246	79 360 AT CA BV IE (4095496)	1-3/8	3
9247	79 440 Truck AT	1-1/2	3
9248	79 440 Truck AT CA	1-1/2	3
9250	79 360 AT CA BV (4095978)	1-3/8	3
9251	80 360 Truck MD CA	1-3/8	3
9252	80 360 Truck MD CA	1-3/8	3
9254	80 318 Truck BV	1-3/8	3
9255	80-85 360 Truck LD MD F		1-3/8
3			
9256	79 318 AT F Alc (4095979)	1-3/8	3
9265	80 360 Truck LD MD F	1-3/8	3
9266	80 360 Truck LD MD F	1-3/8	3
9268	79 360 Truck LD MD BV IE	1-3/8	3
9269	78-79 318 TruckBV	1-3/8	3
9270	78-79 318 TruckBV	1-3/8	3
9271	78-79 318 TruckBV	1-3/8	3
9272	79 360 Truck LD MD BV IE	1-3/8	3
9273	79 360 Truck LD MD BV IE	1-3/8	3
9275	78-79 360 Truck HD BV	1-3/8	3
9276	78-79 360 TruckHD BV	1-3/8	3
9277	79 360 Truck HD	1-3/8	3
9278	78 360 Truck HD	1-3/8	3
9279	80 318 Truck	1-3/8	3
9280	80-85 360 TruckLD MD F	1-3/8	3
9281	80 360 Truck HD	1-3/8	3
9283	81 318 AT BV F (4179132)	1-3/8	3
9284	81 318 AT BV Can Exp (4179133)	1-3/8	3
9288	80 318 Truck LD Can	1-3/8	3
9289	80 446 Motor Home AT BV *	1-1/2	3
9291	80 446 Motor Home AT BV *	1-1/2	3
9292	80 360 Truck	1-3/8	3
9293	81 318 AT BV F (4179145)	1-3/8	3
9295	80 318 AT BV F Alc (4179051)	1-3/8	3
9296	80 318 Truck MD HD	1-3/8	3
9298	80 360 Truck LD MD F	1-3/8	3
9299	80 360 Truck LD MD F	1-3/8	3
9304	81-83 ??? Mexico	1-3/8	-
9305	80 360 AT F	1-3/8	3
9306	80 318 O2 BV	1-3/8	3
9311	81 318 Truck LD	1-3/8	3

9314	81 360 Truck LD MD F				1-3/8	3
9320	80 318 O2 BV				1-3/8	3
9325	81 360 Truck LD Can				1-3/8	3
9326	82 360 Truck LD MD F				1-3/8	3
9327	83 360 Truck LD MD F				1-3/8	3
9329	82 318 Truck LD				1-3/8	3
9330	83 318 Truck LD				1-3/8	3
9331	82 360 Truck LD MD CA Alc				1-3/8	3
9332	83 360 Truck LD MD CA Alc				1-3/8	3
9340	83-84 ??? Mexico				1-3/8	3
9341	83 318 Truck LD				1-3/8	3
9342	82 318 Truck BV (4287013)				1-3/8	3
9357	83 318 Truck MD HD				1-3/8	3
9358	82 360 Truck HD				1-3/8	3
9359	83 360 Truck HD				1-3/8	3
9364	81-84 318 AT Can BV O2 (4179177)				1-3/8	3
9365	83 318 Truck LD				1-3/8	3
9366	84 360 Truck LD MD F				1-3/8	3
9367	83 318 Truck LD				1-3/8	3
9368	83 318 Truck LD				1-3/8	3
9369	84 360 Truck LD MD CA Alc				1-3/8	3
9370	84 360 Truck HD				1-3/8	3
9371	84 318 Truck MD HD				1-3/8	3
9372	81-82 318 AT F BV O2 (4179179)				1-3/8	3
9373	81 318 AT CA BV O2 (4179180)				1-3/8	3
9374	82-83 318 BV O2				1-3/8	3
9375	82 318 Truck BV (4241752)				1-3/8	3
9376	82 360 Truck BV CA (4241753)				1-3/8	3
9379	83 360 Truck BV F (4287016)				1-3/8	3
9380	79-84 ??? Mexico				1-3/8	-
9385	82-83 318 BV O2				1-3/8	3
9386	84 360 Truck BV Alc				1-3/8	3
9387	84 360 Truck BV				1-3/8	3
9388	83 318 AT BV O2				1-3/8	3
9389	84 318 AT BV O2 (4300012)				1-3/8	3
9391	84 318 AT BV O2 HA (4300019)				1-3/8	3
9800	9000 series, GM	4095	5137	2110	1-3/8	5
9801	9000 series, Chrysler	4095	5125	2110	1-3/8	5
9810	9000 series, GM, EGR	4095	5137	2110	1-3/8	5
9811	9000 series, Chrysler, EGR	4097	5125	2385	1-3/8	5

\* Note: The 446 engine used in 79-81 Dodge motorhomes was built by IHC.

-----  
Rochester Quadrajet (M4ME & E4ME) Listing:

Note: O2 denotes the E4ME feedback unit.

Note: identification number is stamped vertically on the left side near the secondary throttle lever.

17085407	85-87 318 O2					
17085408	86 360 Truck AT F (4306408)					
17085409	86 360 Truck AT F HA (4306409)					
17085411	85 318 Can Exp					
17085411	86-87 318 (4306411)					
17085414	85-88 360 Truck HD					
17085415	85 360 Truck HD					

17085416 85-88 360 Truck  
 17085417 86 360 Truck MT F (4306417)  
 17085425 86 360 Truck F (4306425)  
 17085431 86 360 Truck HD CA Can (4306431)  
 17085432 85-88 360 Truck HD  
 17085433 85-89 318 O2 (4306433)  
 17085434 86 360 Truck F (4306434)  
 17087175 85-88 360 Truck  
 17087176 85-88 360 Truck  
 17087177 85-88 360 Truck  
 17087245 85-88 360 Truck HD

-----  
 --  
 Service Parts Information...  
 -----

Metering Rod Info (dimensions in inches):

-----  
 16-XXX is for 71 OEM and CS TQs. 75-XXXX is for 72 OEM and 9000 series.  
 Step sizes listed, Econ = economy, Mid = midrange, Power = power steps.

Rod #	Econ	Mid	Power	
-----	-----	-----	-----	
16-615	.059	--	.040	For CS only.
16-616	.064	--	.030	For CS only.
16-632	.057	--	.040	For CS only.
16-633	.055	--	.040	For CS only.
16-634	.062	--	.030	For CS only.
16-635	.060	--	.030	For CS only.
16-655	.062	--	.040	For 71 OEM TQ only.
16-683	.060	--	.035	For 71 OEM TQ only.
16-683	.058	--	.035	For 71 OEM TQ only.
75-1937	.070	.046	.040	
75-1938	.071	.051	.040	
75-1939	.070	.058	.040	
75-1940	.072	.060	.045	
75-1962	.067	.055	.045	
75-1965	.069	.061	.045	
75-1966	.067	.052	.045	
75-1994	.068	.043	.035	
75-1995	.066	.040	.035	
75-1996	.069	.048	.035	*
75-1997	.067	.045	.035	*
75-1998	.070	.057	.040	
75-1999	.068	.054	.040	
75-2000	.066	.054	.035	
75-2001	.064	.051	.035	
75-2002	.065	.052	.040	*
75-2003	.063	.049	.040	*
75-2004	.067	.058	.040	*
75-2005	.065	.055	.040	*
75-2024	.066	.054	.040	
75-2086	.069	.061	.040	
75-2103	.069	--	.045	
75-2109	.069	.061	.045	
75-2110	.069	.053	.040	
75-2144	.069	.061	.050	

75-2145	.069	.061	.055
75-2153	.067	--	.055
75-2159	.070	.062	.040
75-2179	.074	.066	.042
75-2210	.069	--	.045
75-2211	.0715	.064	.040
75-2385	.069	--	.053

Primary Jet Info (dimensions in inches):

-----  
 120-3XXX is for 71 OEM and CS with screw-in jets. 120-3XX is for CS with press-in jets. 120-4XXX is for 72 and later solid fuel OEM & 9000 series.

Jet #	Size	
-----	----	
120-330	.077	
120-331	.080	
120-332	.083	
120-333	.086	
120-334	.089	
120-335	.092	
120-3074	.074	
120-3077	.077	
120-3080	.080	
120-3083	.083	
120-3086	.086	
120-3089	.089	
120-3092	.092	
120-4092	.092	*
120-4095	.095	*
120-4097	.097	
120-4098	.098	*
120-4099	.099	
120-4100	.100	*
120-4101	.101	*
120-4104	.104	*

\* denotes part of 10-203 Strip kit.

Secondary Jet Info (dimensions in inches):

-----  
 120-3XXX is for 71 OEM and CS with screw-in jets. 120-3XX is for CS with press-in jets. 120-5XXX is for 72 and later solid fuel OEM & 9000 series.

Jet #	Size
-----	----
120-339	.110
120-340	.113
120-341	.116
120-342	.119
120-343	.122
120-344	.125
120-3113	.113
120-3116	.116
120-3119	.119
120-3122	.122
120-3125	.125
120-3128	.128
120-3131	.131

120-5110	.110	
120-5125	.125	
120-5131	.131	*
120-5137	.137	*
120-5143	.143	*
120-5149	.149	*

\* denotes part of 10-203 Strip kit.

Needle and Seat Info (dimensions in inches):

```

-----
Needle/Seat #   Size
-----
25-1068         .111           For CS only.
25-1069         .120           For CS only.
25-1070         .125           For CS only.
25-1086         .0935        *      (stock OEM)
25-1091         .125
25-1103         .111         *

```

\* denotes part of 10-203 Strip kit.

Accelerator Pump Cluster (squirter) Info (dimensions in inches):

```

-----
Cluster #       Size
-----
48-365s         .0
48-369s         .031        *
48-370s         .035        *
48-374s         .075        *
121-662         gasket      *

```

\* denotes part of 48-380U package.

Carb Kits (Zip Kits):

```

-----
Ref   Carter   Hygrade   Kem      B-W      Filko     Echlin    Chrysler
-----
1     902-299B    657C     15543A   10416A   24-2262A  15543A    3837521
2     902-310A    657C     15605    10478    24-2268   15605     4131180
3     902-329C    1574     15711C   10634C   24-2276   15711C    4271945
4     902-330A    1423     15711C   ---      ---      15711C    ---
5     902-318A    ---*     ---      ---      ---      ---      ---
6     902-292    551     ---      10373    ---      ---      3621225
7     902-309    676     15554A   ---      ---      15554A    CT-1062 **
8     5153x      ---     ---      ---      ---      ---      ---

```

\* 902-318A is for the 9000 series, Hygrade 657C is known to work in a 9811.

\*\* CT-1062 is the Motorcraft number for the Ford application.

Carter Strip Kit:

```

-----
Carter 10-104 Strip Kit (Competition Series)
Carter 10-105 Strip Kit (Competition Series...SA)
Carter 10-110 Strip Kit (71 and Competition Series)
Carter 10-203 Strip Kit (72-up) (see Strip Kit section for early versions)

```

Floats:

- - - -

Carter 21-252 (nitrophenyl), 21-249 (brass)  
Chrysler 3780155  
IHC 501288-C1  
Ford D4AZ-9550-B, CM2028  
KEM F104 (brass)  
Borg Warner CF252B (brass), CF252 (nitrophenyl)  
Echlin Fuel Systems 2-483 (brass), 2-427 (nitrophenyl)  
FILKO 19-105 (brass)  
Motorcraft CM-4384 (brass)  
Hygrade FL4 (nitrophenyl)

Chokes:

- - - -

Note: Most of the Chrysler TQ chokes were of the same basic design. In 1973, electric assist was added. Following is a summary of most of the chokes with model applications. Various versions were available due to operating environments and emissions. The listing is per Carter choke numbers from their catalog. Some manufacturer cross-indexing differs. Chrysler and Hygrade listed for reference....

Carter 170-148. Chrysler 3512875:  
4972, 4973, 6138, 6139, 6144

Carter 170-245:  
6090, 6140, 6165, 6166

Carter 170-1371. Chrysler 4287004. Hygrade CV400 (non-electric assist):  
9379 (Canada)

Carter 170-1408. Chrysler 3698355, 3751484, 4027715, 4027793, 4095328. Hygrade CV164:  
6318, 6319, 6320, 6321, 6322, 6324, 6339, 6340, 6341, 6342, 6410, 6411, 6456, 6457, 6459, 6460, 6461, 6462, 6463, 6503, 9008, 9009, 9010, 9011, 9012, 9014, 9015, 9016, 9023, 9024, 9046, 9049, 9050, 9051, 9052, 9053, 9054, 9056, 9057, 9058, 9059, 9062, 9063, 9064, 9065, 9066, 9068, 9069, 9072, 9073, 9074, 9077, 9078, 9080, 9081, 9094, 9095, 9097, 9099, 9100, 9101, 9102, 9103, 9108, 9112, 9114, 9116, 9119, 9127, 9140, 9149, 9153, 9182, 9188, 9190, 9221, 9243, 9251, 9252, 9254, 9275, 9279, 9281, 9288, 9292, 9296, 9359, 9370, 9375, 9376, 9379

Carter 170-1409 (non-electric assist):  
6518, 9000, 9117, 9118, 9150, 9151, 9212, 9214, 9357, 9358, 9371

Carter 170-1490. Chrysler 4027792, 4095984, 3830548, 4027714, 4095341. Hygrade CV172, CV174:  
6452, 6453, 6454, 6455, 6488, 9002, 9004, 9055, 9076, 9093, 9104, 9115, 9123, 9124, 9125, 9126, 9134, 9136, 9137, 9147, 9152, 9173, 9183, 9185, 9187, 9193, 9194, 9195, 9196, 9197, 9198, 9202, 9207, 9208, 9209, 9210, 9211, 9215, 9216, 9217, 9218, 9223, 9224, 9225, 9226, 9227, 9228, 9229, 9245, 9246, 9250, 9255, 9256, 9265, 9266, 9268, 9269, 9270, 9271, 9272, 9273, 9276, 9277, 9278, 9298, 9299, 9311, 9314, 9329, 9330, 9331, 9332

Carter 170-1598 (non-electric assist):  
9234, 9236, 9244, 9305, 9306, 9320

Carter 170-1621. Chrysler 4095331. Hygrade CV241:  
9325, 9341, 9342, 9364, 9365, 9366, 9367, 9368, 9369, 9386, 9389

Carter 170-1675:  
9283, 9284, 9293, 9364, 9372, 9374, 9385, 9388

Carter 170P-1322A:  
9800, 9801, 9810, 9811 (integral choke, 9000 series)

Also note:  
73-up without electric assist: Chrysler 4027795, Hygrade CV370.

Choke Pull-offs:

- - - - -

Note: Most of the TQs used the same choke pull-off. Many 81-84 units used the same diaphragm with a different bracket for the tamper-resistant housing. Some 81-84 Dodge trucks, IHC units and Ford used a secondary pull-off. The listed pull-offs cover most applications...

Carter 202-742, 202-664 (71-up)  
Chrysler 3621210, 4049239, 4049240, 4049275, 4131250 (71-up)  
Hygrade CPA77 (71-up)  
IHC 460369C1 (74-80)  
Ford D4AZ-9J549a (74)  
KEM CP146 (71-up)

Carter 202-818 (81-84 tamper-resistant)  
Chrysler 4267133 (81-84 tamper-resistant)  
Hygrade CPA276 (81-84 tamper-resistant)  
KEM CP319 (81-84 tamper-resistant)

Carter 202-821 (81-84 secondary pull-off)  
Chrysler 4267137 (81-84 secondary pull-off)  
Hygrade CPA269 (81-84 secondary pull-off)  
KEM CP320 (81-84 secondary pull-off)

Carter 202-981 (84 secondary pull-off, vacuum controlled)

Miscellaneous Parts:

- - - - -

O-ring, main well cavity: Carter 163-90, Chrysler 3685655 (or 3549406)  
Needle & Seat: Chrysler 3621161, Carter 25-1086 (OEM size), Hygrade VN87C  
Accelerator pump: Chrysler 4094867, Carter 64-465  
Spreadbore/squarebore adaptor: MP P4007522, Edelbrock # 2691.  
Air horn gasket: Chrysler 53030600  
1/4" spacer base gasket: Chrysler 3698365  
Set of four, 1/4" spacer base gasket (3698365): MP P4007902  
Solenoid Bowl Vent: Carter: 213-93 (78), 213-145 (79-84 Truck, 79-80 CA),  
213-211 (81 CA MT, Can, 81-84 Export), 213-111 (80-84  
Mexico), 213-229 (CA AT Truck), 213-240 (81 CA late  
Truck)  
Pulsing Solenoid (O2): 213-193 (81-84 318 car)

Tools:

- - -

Air Valve Tool: Carter 109P-397, Miller Special Tools # C-4152B

-----  
Strip Kits...  
-----

Carter produced Strip Kits in the 70s through the mid-80s for the Thermo-Quad. These are tuning kits for modifying the performance of the TQ. They consist of various metering rods, primary and secondary jets and needle/seats.

There were kits for the Competition Series and specific kits for the early OEM/9000 TQs. Later, Carter consolidated the kits for the 72-later OEM and 9000 series into a single kit. Carter also offered kits for the WCFB, AFB, and AVS four barrels. A current version of the AFB kit is still available. All the TQ kits and others have been discontinued. Following is a listing of the early and late TQ kit contents. The other kits are also listed as a reference.

Early Kits, CS and other carbs:  
-----

Kit # Carb Type and Models Covered  
-----

- 10-101 AFB 3783, 4758, 4759, 4761, 9500, 9625
- 10-102 AFB 4760, 4762
- 10-103 AFB 3361, 3720, 3721, 3804
- 10-104 TQ CS4846S, CS4847S (press-in jets)
- 10-105 TQ CS4846SA, CS4847SA (screw-in jets)
- 10-106 AVS all
- 10-107 AFB 4139, 4324, 4325, 4343, 4402, 4430, 4431, 4432, 4619, 4620, 4621, 4742, 4745, 4746, 4969, 4970, 4971
- 10-108 WCFB 2669, 2816, 2817, 2818, 3059, 3060, 3061, 3190, 3191, 3500, 3501, 3696, 3697
- 10-109 WCFB 2214, 2218, 2219, 2330, 2351, 2361, 2366, 2419, 2505, 2574, 2575, 2626, 2627, 2656, 2657, 2829, 2830, 3181, 3769

Early Kits, OEM and 9000 TQ:  
-----

Kit # Carb Type and Models Covered, with contents  
-----

- 10-110 TQ 4972, 4973 ('71 340)
  - primaries: .074, .077, .080, .083
  - secondaries: .119, .122, .125, .128, .131
  - needle/seats: .0935", .111"
  - rods: 655, 682, 683
- 10-111 TQ 6138, 6139, 9002, 9011
  - primaries: .092, .095, .098, .101, .104

- secondaries: .131, .143, .149
  - needle/seats: .0935", .111"
  - rods: 1998, 1999
- 10-112 TQ 6140, 6615, 9034
- primaries: .092, .095, .098, .101, .104
  - secondaries: .131, .143, .149
  - needle/seats: .0935", .111"
  - rods: 2000, 2001
- 10-113 TQ 6090
- primaries: .092, .095, .098, .101, .104
  - secondaries: .131, .143, .149
  - needle/seats: .0935", .111"
  - rods: 1995, 2005
- 10-114 TQ 6165, 6166, 9800
- primaries: .092, .095, .098, .101, .104
  - secondaries: .131, .143, .149
  - needle/seats: .0935", .111"
  - rods: 1996, 1997
- 10-115 TQ 6318, 6319, 6321, 6322, 6324, 6339, 3640, 6342, 6410, 6411, 6452, 6454, 6456, 6457, 6459, 6460, 6488, 6616, 9013, 9016, 9017, 9022, 9023, 9025
- primaries: .092, .095, .098, .101, .104
  - secondaries: .131, .143, .149
  - needle/seats: .0935", .111"
  - rods: 2002, ??
- 10-116 TQ 6320, 6341, 6453, 6455, 6461, 6496, 9004, 9008, 9009, 9012, 9014, 9015, 9024, 9046, 9049, 9050, 9051, 9052, 9053, 9054, 9063, 9072
- primaries: .092, .095, .098, .101, .104
  - secondaries: .131, .143, .149
  - needle/seats: .0935", .111"
  - rods: 2003, 2004

Later Kits, OEM and 9000 TQ:

-----

Kit # Carb Type and Models Covered, with contents

-----

- 10-203 TQ All 1972 and later solid fuel type carburetors.
- primaries: .092, .095, .098, .100, .101, .104
  - secondaries: .131, .137, .143, .149
  - needle/seats: .0935", .111"
  - rods: 1996, 1997, 2002, 2003, 2004, 2005

Later Kits, AFB, AVS:

-----

Kit # Carb Type and Models Covered

-----

- 10-201 AFB All 9000 series, all Competition Series, All OEM w/2 step rod.  
 10-202 AVS All, All OEM AFB w/3 step rod, high step primary jet.

Note: Special thanks to David Wright on the MML for providing copies of the early documentation and typing the early kit contents and applications.

-----  
--  
References...

- 
- Carter Service Manual # 3623A "Thermo--QQuad"
  - Carter Service Manual # 3630A "Basic FFaacts and Principles"
  - Carter Carburetors catalog, # 3878, Apprril 1975
  - Carter Floats catalog 1980
  - Carter Carburetor95 catalog, # 3788, AAAugust 1977
  - Carter Zip Kits & Carburetor Componenttss catalog, # 3880, 1991
  - Carter Carburetor Emission Components ccatalog, # 3881, 1989
  - Carter Performance Products catalogs 119979, 1980, 1982, 1984
  - Carter Strip Kit Specifications & Instttructions, # 3270, 1-73, revised 11-75
  - Carter Strip Kit label, # 3272, 7-75
  - "Carter Carburetors", SA-Designs, Davee Emanuel, 1983
  - Chrysler Technical Guide, Thermo-Quad CCarburetor, 1982, # 81-699-2009
  - Chrysler Student Reference Book, Quadrraajet Carburetor, 1984, # 81-699-5003
  - Chrysler factory service manuals, variioous, 1971-1984
  - Chrysler parts catalogs, various, 19711--1984
  - Chrysler Technical Service Bulletin # 114-01-72C, Dec. 15 1971.
  - Direct Connection & Mopar Performance ccatalogs
  - Mopar Performance Engine Manual, # P522449010, 8th Edition
  - Hot Rod magazine, June 1970
  - Car Craft magazine, March 1972
  - The Hot-Rodders Manual for Street & Stttripp, '79-'80 & '81-'82 Annual (Hot Cars)
  - Popular Hot Rodding, October 1973, Octtoober 1981
  - High Performance Mopar magazine, Summeerr 1988.
  - Mopar Action magazine, February 1991, OOctober 1991.
  - Mopar Muscle magazine, August/Septembeerr 1995.
  - Chrysler Power magazine, January, Marcchh, May 1988.
  - KEM Air & Fuel Management Systems Parttss, # AF-114, 1993
  - KEM All Line Buyers' Guide, # BG-116, 11995
  - Hygrade Carburetor Kit & Component Parrtts Guide, # FC-91, 1991
  - Hygrade Carburetor & Fuel System Partss Guide, # CM-88, 1988
  - Hygrade Carburetion Component Guide, ## FT-91, 1991
  - Holley Replacement Carburetors catalogg,, # L-30033-4, Spring 1985
  - Borg Warner Carburetor Kits catalog, ## CK-79, Sept 1979
  - Motorcraft Carburetor, Emission Parts && Tune-up Kits, # F200W, 1985
  - AC-Delco Carburetors & TBI, Carb Kits && Parts, # 9A-100, 1986
  - Tomco Remanufactured Carburetors & TBII catalog, # D.I. 1991, 1991
  - Kimco Carburetors, # 30-9, 3-1-83
  - Kimco Carburetor Numerical Listing & OO..E.M. Section, # 30-9, 3-1-83
  - Mopar Mailing List (MML) postings
  - My memory (not so good) and my Thermo--QQuads (somewhat better).

-----  
--  
Acknowledgements...

- 
- Thanks to David Wright for early Stripp Kit information.
  - Thanks to Cam, Uncle Pete, Jim, and Daavvid for brass float information.
  - Thanks to the MML in general.

