

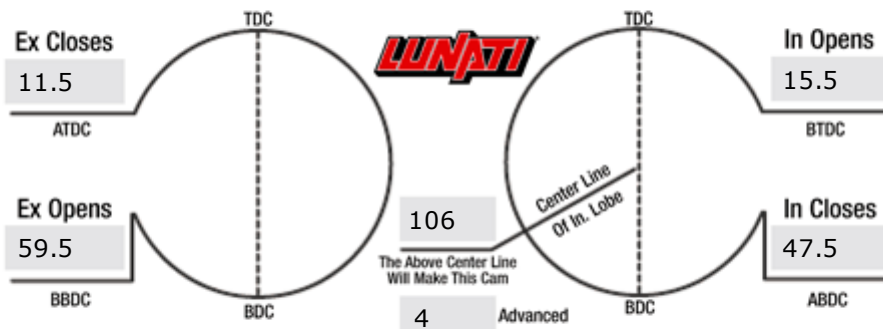
Part # 60441

Grind # VDSCR-272

Application MOPAR 273-360

RPM Range 2600-6800

Lobe Sep. 110

ALWAYS use recommended SPRINGS and LIFTERS

- Lift At Valve -

.546

IN

.566

EX

- Rocker Ratio -

1.5

IN

1.5

EX

- Valve Adjustment -

0.014

IN

0.014

EX

Timing Figures Obtained At .050" Tappet Lift

- Duration At .050" Tappet Lift -

243

IN

251

EX

- Advertised Duration -

272

IN

280

EX

Recommended Kit # 73195K1LUN

Consists Of The Following Parts

Lifters 70937

Valve Springs 73195LUN

Retainers 75740LUN

Valve Locks 77126LUN

Installed Height 1.700 = 130 Lbs.

For professional technical support or product information, contact us at:

(662) 892-1500
lunatipower.com